



HWB041-3

PATIENT
TRANSPORTATION
TROLLEY



Healthward[™]

Healthier
your life

HWB041-3

FEATURES AND HIGHLIGHTS

Technical parameters

X-ray Backrest

| | |
|---|-------------|
| ▪ External size (LxW): | 2120x840 mm |
| ▪ Height from floor to bed platform: | 550-860 mm |
| ▪ Height from floor to lowered guardrail: | 590-900 mm |


X-ray Platform

| | |
|---|-------------|
| ▪ External size (LxW): | 2120x840 mm |
| ▪ Height from floor to bed platform: | 600-910 mm |
| ▪ Height from floor to lowered guardrail: | 640-950 mm |

| | |
|--------------------------|-------------|
| ▪ Back plate adjustment: | 0-85° (±5°) |
| ▪ Knee-rest adjustment: | 0-40° (±5°) |
| ▪ Reverse Trendelenburg: | 0-15° |
| ▪ Trendelenburg: | 0-15° |

Technical configuration

| | |
|---|--------|
| <input checked="" type="checkbox"/> Usa hydraulic pump | 2 pcs |
| <input checked="" type="checkbox"/> Crank system | 1 set |
| <input checked="" type="checkbox"/> Back rest air spring | 2 pcs |
| <input checked="" type="checkbox"/> 8" German castors,central locking | 4 pcs |
| <input checked="" type="checkbox"/> Emergency push handle | 1 set |
| <input checked="" type="checkbox"/> Directional wheel | 1 pc |
| <input checked="" type="checkbox"/> Folding side rail | 1 set |
| <input checked="" type="checkbox"/> Φ74mm wall bumper wheel | 4 pcs |
| <input checked="" type="checkbox"/> Iv pole previsions | 4 pcs |
| <input checked="" type="checkbox"/> Mattress | 1 pc |
| <input checked="" type="checkbox"/> IV pole | 1 set |
| <input checked="" type="checkbox"/> Central locking break pedal | 2 sets |
| <input checked="" type="checkbox"/> Directional wheel release pedal | 2 pcs |
| <input checked="" type="checkbox"/> X-ray translucent bed platform | 1 set |

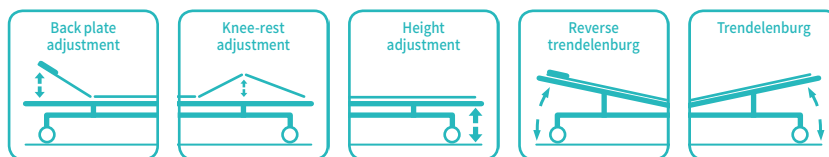

Metal material

Baosteel from Fortune Global 500 Panasonic Robotic ensure 360° full smooth wedding.



Plastic

Environmental plastic can be sterilized in 100°C, tensile upto 30MPa.



Steels | Painting

11 Process epoxy painting, ASTM testing anti-bacterial, paint thickness 0.12 mm, brightness 60°, paint can resist 50 kg impact.



Brake

Break spring keep qualified after 10,000times uninteruped break.



Hydraulic pumps

Height adjustment, trendelenburg and revised tendelenburg through two USA hydraulic pumps.




Center wheel

Can be engaged to facilitate direction control, enabling users to navigate the stretcher easily in hectic and dynamic environments.



Rising

Hydraulic treadle for rise.

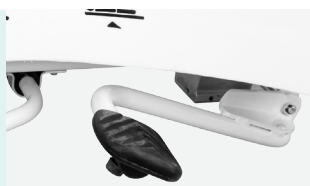

Falling

① Leg section lows down to make head higher.
② Back section lows down to make leg section higher.
③ Step on the middle of the pedal, make the bed base fall down steadily.



Castors

Four double side casters of 6 inch diameter, simultaneously lockable by the step pedal at both sides. TPR tire no worn out after running 30KM, save anti-winding hard shell, united forming without bolts.



Mattress

Waterproof PU mattress, convenient for transfer patient.



Side rail

Foldable aluminium alloy guardrail



Bumper wheel

Bumper wheel detachable, max. protect the bed and patient during transportation




Drainage Hooks

Mobile plastic drainage hooks.



IV pole

Stainless Steel Column with plastic hook.



As the circumstance of printing, the photos might have minor difference on color, tactile from real products.
As the update of design and improvement, parameters and outlook of products might change, thanks for understanding.

Healthward



 17800 CASTLETON ST STE 180.CITY OF INDUSTRY CA 91748

 +1 (603) 416-3063 ·  24/7

 export@health-ward.com

 www.health-ward.com



General catalogue