
Grace Care series

HWD8d MULTIFUNCTIONAL ELECTRIC BED




Healthward`

ISO 🔅 🖓 (E FDA 🎆 🦄

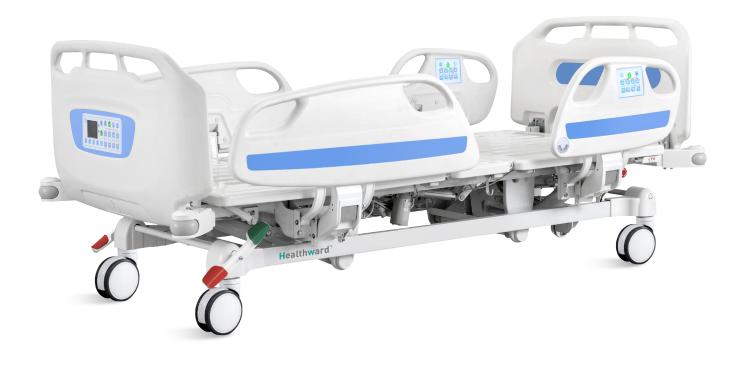

Product data sheet

HWD8d FEATURES AND HIGHLIGHTS

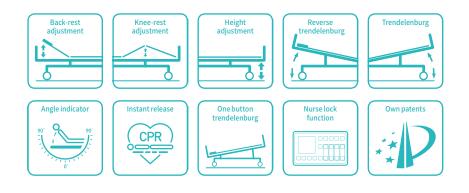

Technical parameters

External size (LxW):	2280x1090 mm
Mattress platform:	1925x900 mm
Safe working load:	250 kg
Height adjustment:	435-725 mm
Back-rest adjustment:	0-75° (±10°)
Knee-rest adjustment:	0-35° (±10°)
Reverse Trendelenburg:	0-12°
Trendelenburg:	0-12°
Angle indicator:	0-90°
 Voltage and frequency: 	100-240 V · 50/60 Hz
 Plug as required (hospital grade) 	

Technical configuration

\checkmark	Manual CPR	
\checkmark	One button stop	
V	One button trendelenburg	
V	Nurse lock system	
V	Angle indicator for back-rest and Trendelenburg position	4 pcs.
\checkmark	Linear motor	4 pcs.
7	5" double side castors with central locking system	4 pcs.
\checkmark	ABS side rail with integrated control panel	1 set
V	ABS bed ends with integrated LCD control panel	1 set
V	φ85 mm wall bumper wheel	4 pcs.
7	Trapeze socket	2 pcs.
V	IV pole	1 set
\checkmark	IV pole prevision	4 pcs.
\checkmark	Drainage hook	2 pcs.
7	Central locking pedal	2 pcs.



Optional

Electrical CPR
U Weighing system with LCD Screen
Bed extension
Back-up battery
Cardiac position
ABS bed surface
X-ray bed surface
Monkey pole
Balkan traction frame
Directional wheel
Basic foam mattress (12 cm thickness)
Anti-decubitus foam mattress (14 cm thickness)
□ Vertical oxygen holder
Single arm lifting pole
Utility shelf

Head and Foot Board

Extra long and height head foot board, with curve surrounded design, provide conforting feeling for patients.

Welding | Chassis

Panasonic robotic ensure, 360° full smooth wedlding. Solid bed base made of 5.0 mm stamped rotating plate.

Steels | Painting

Baosteel from Fortune Global 500. 11 Process epoxy painting, ASTM testing anti-baterial, paint thickness 0.12 mm, brightness 60°, paint can resist 50 kg impact.

LCD

Unique design head foot board with built-in controller. 3.5 inch LCD display, shows moving angle. Buttom can endure 100,000 times press.



TPR tire no worn out after running 30 km, save anti-winding hard shell, united forming without bolts. Pass dynamic test: Bearing 120 kg, run 30 km and pass obstacles 500 time.

Angle Indicator Patented angle indicator.

Safety IEC60601 Safty Standard.



IV pole Stainless Steel Column with plastic hook.



Bed Surface

Stamping forming platform, smooth surface no welding scar, bearing 250 kg load. Option ABS platform and resin X-ray translucent platform.



Virgin ABS

30MPa.

Linear motor, with UL/ROHS/EN standard. Noise under 50 dB, with lifetime 20,000 times movement.

Environmental plastic can be

sterilized in 100°C, tensile upto







Side Rail Tuck away side rail with buffer, built-in controller and angle indicator.



Durable Brakes Break spring keep qualified after 10,000 times uninteruped break.



Bumper Wheels Patented bumper wheel detachable, max. protect the bed and patient during transportation.



Drainage Hooks Mobile plastic drainage hooks.

Optional Battery: 18 times movement with 100 kg bearing, 130 times movement without bearing. Nurse control board. Storage rack under foot board drawer. Store controll board or linens. Utility basket: big size 600x540x80 mm.





- arman



Healthward `

As the circumstance of printing, the photos might have minor difference on color, tactile from real products. As the update of design and improvement, parameters and outlook of products might change, thanks for understanding.



- 17800 CASTLETON ST STE 180.CITY OF INDUSTRY CA 91748
- 🕕 +1 (603) 416-3063 · 🕓 24/7
- export@health-ward.com
- () www.health-ward.com

