





HWX12

Electric
Treatment Table

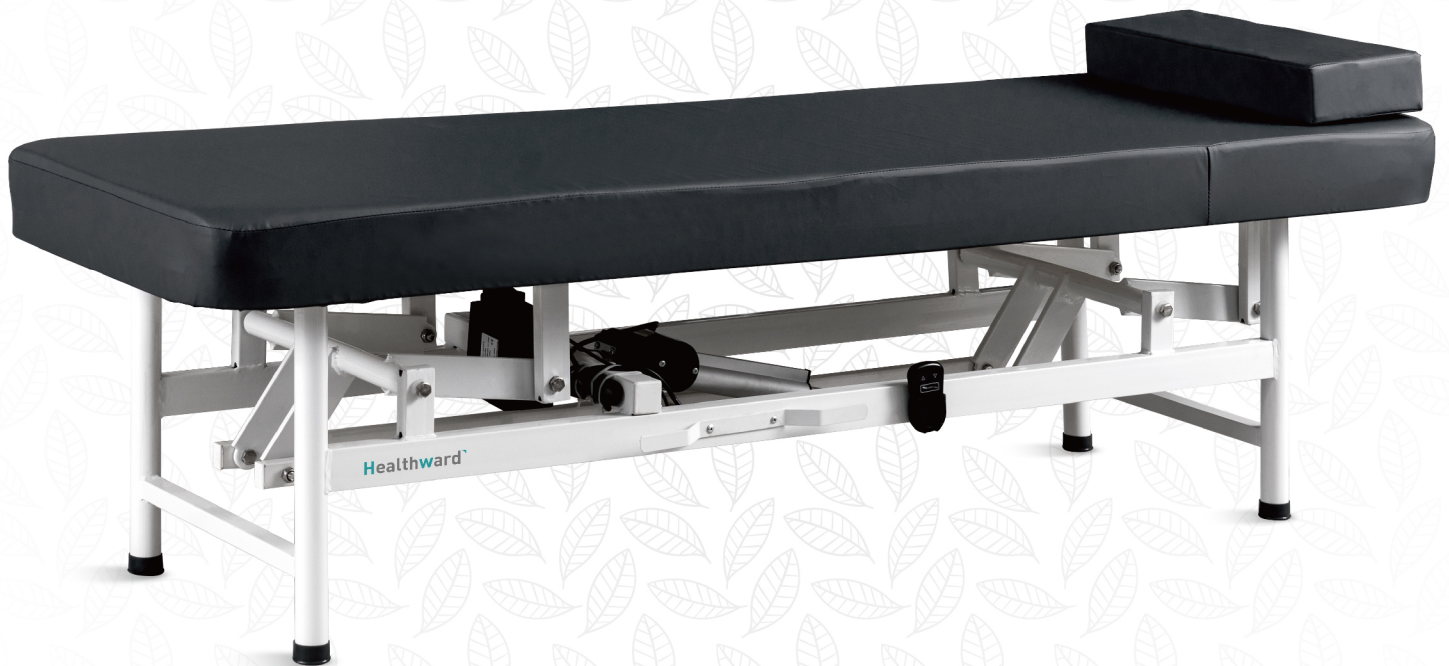

Healthward™



Height Adjustment

TECHNICAL PARAMETERS

External L*W*H 1900*600* (500-800) mm

TECHNICAL CONFIGURATION

Linear Motor	1pc
Anti-slip Bed Feet Cover	4pcs
Removable Pillow	1pc

ELECTRONICS

Voltage	100-240V
Frequency	50/60Hz
Plug	as required (hospital grade)



ELECTRIC SYSTEM

Taiwan motor, Noise under 50dB, with lifetime 20,000times movement

50.00 | 20,000times

QUALITY CONTROL

LEATHER

Flame retardant, yellow resistance, mildew resistance, bending resistance, 100,000 times wear resistance

100,000times



SPONGE

Flame retardant, 4 cm thickness, high-density foam, density 30 kg/m³

4cm | 30kg/m³



PAINTING

11 Process epoxy painting, ASTM testing anti-bacterial, paint thickness 0.12mm, brightness 60°, paint can resist 50kg impact

0.12mm | 60° | 50kg



METAL MATERIAL

Baosteel from Fortune Global 500
Panasonic Robotic ensure 360° full smooth welding

500 | 360°



RICH PARTS



1.2-1.5 mm Thickness powder coated steel frame, 250 kg bear loading



4 pcs Anti-slip bed feet covers



Hand controller, keep qualified after 2000 times use



As the circumstance of printing, the photos might have minor difference on color, tactile from real products.
As the update of design and improvement, parameters and outlook of products might change, thanks for understanding.

Healthward



 17800 CASTLETON ST STE 180.CITY OF INDUSTRY CA 91748

 +1 (603) 416-3063 ·  24/7

 export@health-ward.com

 www.health-ward.com



General catalogue