




Oasis Series

# HWY6t

## ELECTRIC BED

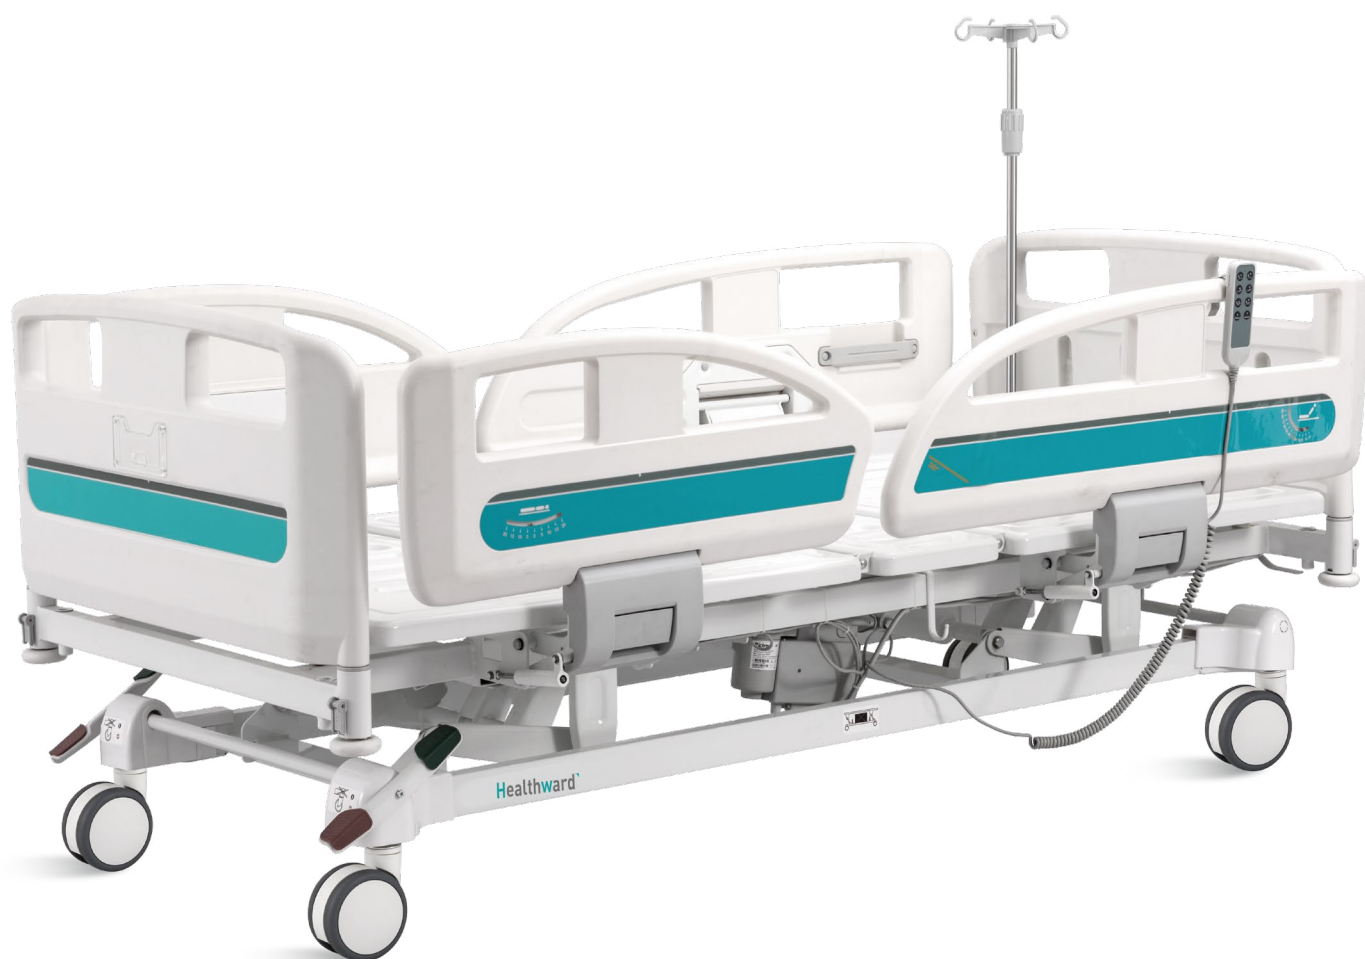

**Healthward**

Healthier  
your life

# HWY6t

## FEATURES AND HIGHLIGHTS



### Technical parameters

▪ External size (LxW)	2130x1060 mm
▪ Mattress platform	1925x900 mm
▪ Safe working load	250 kg
▪ Height adjustment	475-760 mm
▪ Back-rest adjustment	0-75° (±10°)
▪ Knee-rest adjustment	0-35° (±10°)
▪ Angle indicator	0-90°
▪ Position line	30°
▪ Voltage and frequency	100-240 V · 50/60 Hz
▪ Plug as required (hospital grade)	
▪ Hand controller	

### Technical configuration

<input checked="" type="checkbox"/> Linear motor	3 pcs
<input checked="" type="checkbox"/> 5" double side castors, central locking system	4 pcs
<input checked="" type="checkbox"/> ABS Oasis side rail extra height	1 set
<input checked="" type="checkbox"/> ABS Oasis bed ends with safe lock	1 set
<input checked="" type="checkbox"/> Stamping forming bed platform	1 pc
<input checked="" type="checkbox"/> Plastic socket inside pp guardrail for phone or glasses	2 pcs
<input checked="" type="checkbox"/> Patent angle indicator for back-rest and trendelenburg position	4 pcs
<input checked="" type="checkbox"/> Ø70mm wall bumper wheel	4 pcs
<input checked="" type="checkbox"/> IV pole	1 set
<input checked="" type="checkbox"/> IV pole prevision	4 pcs
<input checked="" type="checkbox"/> Drainage hook	2 pcs

### Optional

- Integrated control panel in side rail
- Back up battery
- Directional wheels function
- ABS mattress stopper
- Manual CPR
- Electric CPR



**Welding | Chassis**

Panasonic robotic ensure, 360° full smooth wedding.  
Solid bed base made of 5.0 mm stamped rotating plate.

**Steels | Painting**

Baosteel from Fortune Global 500.  
11 Process epoxy painting, ASTM testing anti-bacterial, paint thickness 0.12 mm, brightness 60°, paint can resist 50 kg impact.

**Electric motor**

Linear motor, with UL/ROHS/EN standard. Noise under 50 dB, with lifetime 20,000 times movement.

**Bed Surface**

Stamping forming platform, smooth surface no welding scar, bearing 250 kg load.

**Wheels**

Castors with TPR tire, no worn-out after running 30KM, united forming without bolts.  
Pass Dynamic test: Bearing 120kg run 30KM and pass obstacles 500time.

**Brake**

Three position braking system, transporting can maintain a straight line.

**Socket**

On side rail for placing the patient cellphone or glasses.

**Angle indicator**

Patent angle indicator, clearly show back-rest position.

**Head & foot board**

Detachable PP head&foot board(Y19), with medical record card on foot panel, patent design, using the eccentric locking structure, one step quick removable.

**Siderail**

4 pcs PP siderail (T20), with patent angle indicators on each one, clearly show back-rest and tredelenburg position.

**Controller**

Hand controller within reach.  
Clear and easy to use controllers which is at the patient's disposal.

**Wall bumper wheel**

Φ70mm bumper wheels at the outermost periphery of the bed to protect the bed and wall, anti-collision and durable.

**IV pole**

Stainless Steel Column with plastic hook.

**Drainage hooks**

Mobile plastic drainage hooks.





As the circumstance of printing, the photos might have minor difference on color, tactile from real products.  
As the update of design and improvement, parameters and outlook of products might change, thanks for understanding.

# Healthward



 17800 CASTLETON ST STE 180.CITY OF INDUSTRY CA 91748

 +1 (603) 416-3063 ·  24/7

 export@health-ward.com

 www.health-ward.com



General catalogue